

CT 7

UNIVERSAL




Multi-purpose primer

Apply primer substrates before: fixing ceramic tiles and thermal insulation panels, painting, wallpapering, filling

PROPERTIES

- ▶ reduces absorbency of the substrate
- ▶ improves adhesion to substrates
- ▶ allows walls to breathe
- ▶ facilitates application of subsequent layers of e.g. adhesives, putties, paints

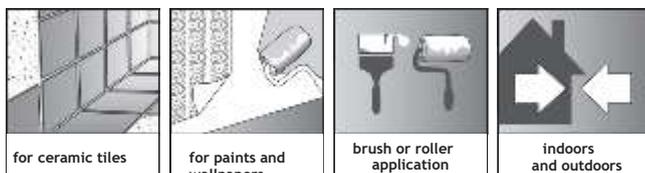

SCOPE OF USE

Ceresit CT 7 is a primer for absorbent substrates such as concrete, traditional cement and cement-lime plasters, cellular concrete. The application of CT 7 is particularly recommended for gypsum and aerated concrete substrates. It is also suitable for priming non-impregnated plasterboard. Ceresit CT 7 can be used inside and outside buildings, e.g. before fixing ceramic tiles, filling, painting, wallpapering or fixing thermal insulation panels. The primer is solvent-free. Substrates primed with CT 7 are less absorbent, which prevents gluing mortars, putties or paints from drying too quickly. The product penetrates into the substrate and binds the aggregate grains, but does not increase the strength parameters across the entire cross-section of the substrate. Ceresit CT 16 or CT 15 primer should be used for priming substrates under thin layer plasters.

SURFACE PREPARATION

Substrates to be primed with CT 7 must be dry, load-bearing and free from substances that reduce adhesion: grease, bitumen, dust, etc. Dirt and layers of poor strength should be removed. This also applies to existing adhesive paints, which must be scraped off and washed with water. Gypsum substrates and strong paint coatings must be sanded with coarse sandpaper and thoroughly cleaned and



vacuumed. In areas of algae growth and mould infestation use Ceresit CT 99 fungicide according to its technical data sheet.

APPLICATION

Shake the contents of the container several times. Apply the product on the substrate using a brush or a roller. CT 7 dries in approx. 2 hours. If the substrate is still absorbent after the preparation has dried, the priming operation should be repeated.

Wash tools and fresh splashes with water.

CAUTION

Work should be carried out with ambient and substrate temperatures between +5°C and +25°C and with air humidity below 80%. In case of contact with eyes, rinse thoroughly with copious amounts of water and contact a physician.

STORAGE

Up to 12 months from the production date when stored in cool conditions and in the original, undamaged packaging.

Protect from frost!

PACK SIZE

5L and 1L canister.

TECHNICAL DATA

Base:	aqueous synthetic resin dispersion
Density:	approx. 1.0 kg/dm ³
Application temperature:	between +5 C and +25 C
Dry Time:	approx. 2 hours depending on absorbency of the substrate and thermal/humidity conditions
Wear:	0,1 to 0,5L/m ² depending on evenness and absorbency of the substrate

Any technical advice can be obtained at the telephone numbers:

+48 800 120 241

+48 41 3710124.

In addition to the information provided in this data sheet, the rules of the trade, guidelines of institutes and associations, relevant national and European standards, approval documents, health and safety regulations, etc. must be observed. The properties and technical characteristics listed above are based on practical experience and tests. Any properties and applications of materials outside the scope of this data sheet require our written consent. All data refers to a substrate, ambient and material temperature of +23° C and a relative humidity of 50%, unless otherwise stated. In other climatic conditions, the specified parameters may vary.

The information contained in this data sheet, in particular recommendations concerning the method and conditions of application, as well as the scope of application and use of our products, is based on our professional experience. This technical sheet defines the scope of application of the material and the recommended method of executing the work, but it cannot replace the professional preparation of the contractor. The manufacturer guarantees the quality of the product, but has no control over the conditions and method of its use. Given that the conditions in which the products are used may change, it is recommended to perform your own tests in case of any doubts.

We will not be liable for the above information or any verbal recommendation related thereto, except in cases of gross negligence or wilful misconduct. This technical sheet replaces all previous versions applicable to this product.