




LePage® PL® 400® Subfloor & Deck Adhesive

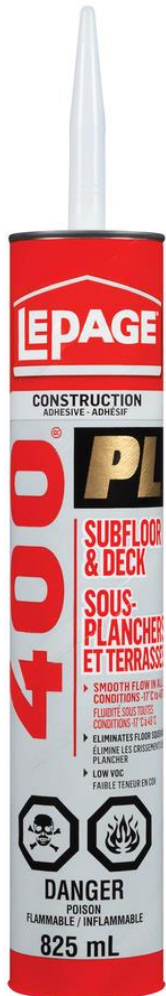

DESCRIPTION

LePage® PL® 400® Subfloor & Deck Construction Adhesive provides a strong bond and is formulated for interior or exterior subfloor construction. Its cold weather formula offers easier extrusion and strong adhesion in all weather conditions. PL 400 Subfloor & Deck Adhesive bonds to most building materials to provide reliable performance. Its low VOC and toluene-free formulation.

Available as:

| Item # | Package | Size |
|---------|-----------------|--------|
| 1654126 | Paper Cartridge | 295 mL |
| 1601357 | Paper Cartridge | 825 mL |

FEATURES & BENEFITS

- All-Weather Application
- Cold Weather Extrusion at -18°C (0°F) or above
- Bridges Minor Gaps in Framing
- Helps Reduce Squeaky Floors
- Strong Adhesion to Most Building Materials

RECOMMENDED FOR

LePage PL 400 Subfloor Adhesive can be used in most interior and exterior construction projects either on the job or the production line. It bonds most wood-to-wood assemblies. It is primarily designed for on-site bonding of subfloor and plywood decking to wood joists. PL 400 Subfloor Adhesive is suitable for use on plaster, metal, masonry, concrete, wood, brick, ceramic tile, slate, treated lumber* and most other projects requiring an adhesive.

LIMITATIONS

- Strict adherence to installation instructions must be followed when used with glued floor systems
- Not recommended for vinyl plank flooring materials or other composite flooring materials
- Not for use on polyethylene (PE), polypropylene (PP), polytetrafluoroethylene (PTFE) and acrylic plastics
- Not recommended for use on unlined expanded or extruded polystyrene plastic foams
- Not suitable for permanent water immersion or areas of constant moisture exposure
- Not suitable for applications requiring temperature resistance greater than 49°C (120°F) or below -28°C (-20°F)
- Not for use on mirrors or tub and shower surrounds
- Not recommended for bonding two non-porous surfaces
- *Test adhesion to treated wood before starting project. Treatments vary widely and can adversely impact adhesive bond and performance

COVERAGE

For a 295 ml cartridge:

- A 6 mm (1/4") bead extrudes approximately 9.3 m (30.6 ft.)
- A 9.5 mm (3/8") bead extrudes approximately 4.1 m. (13.6 ft.)

For a 828 ml cartridge:

- A 6 mm (1/4") bead extrudes approximately 26 m (86 ft.)
- A 9.5 mm (3/8") bead extrudes approximately 12 m (38 ft.)



TECHNICAL DATA SHEET

Revision: 01/11/2022
Supersedes: 07/05/2016
Ref. #: 477621

TECHNICAL DATA

| Typical Uncured Physical Properties | | Typical Application Properties | |
|---|--|---------------------------------|---|
| <u>Color:</u> | Light Tan | <u>Application Temperature:</u> | Apply between -18°C (0°F) and 38°C (100°F) for optimal performance For best results, store adhesive at 23°C (73°F) 24 hours before use |
| <u>Appearance:</u> | Thick paste | <u>Odor:</u> | Acetone |
| <u>Base:</u> | Synthetic rubber and resins Formaldehyde free | <u>Working Time:</u> | 15 minutes* at 25°C (78°F) and 50% RH |
| <u>Viscosity:</u> | 375,000 cps | <u>Extrusion Force:</u> | Approx. 60 lbs. at 23°C (73°F) |
| <u>Specific Gravity:</u> | 1.39 | <u>Vertical Sag:</u> | 0.125 inches ASTM C639 |
| <u>Flashpoint:</u> | -17°C (1.4°F) | <u>Cure Time**:</u> | 2 – 7 days* at 25°C (78°F) and 50% RH *Time is dependent upon temperature, humidity, porosity of substrate and amount of adhesive used |
| <u>% Solids by Weight:</u> | 80% | <u>Clean Up:</u> | Clean up uncured adhesive residue with mineral spirits. Scrape away cured adhesive using a sharp-edged tool. |
| <u>VOC Content:</u> | 0.25% by weight (CARB) 7.5 g/L (SCAQMD) | | |
| <u>Shelf Life:</u> | 18 months from date of manufacture (unopened) | | |
| <u>Lot Code Explanation:</u> YYDDD YY = Last Two Digits of Year of Manufacture DDD = Day of Manufacture based on 365 days per year For example: 19061 = March 2, 2019 | | | |

* Time is dependent upon temperature, humidity, porosity of substrate and amount of adhesive used

** Cure time is significantly increased in cold temperatures and/or low humidity conditions

Typical Cured Performance Properties

| | | | |
|--|---------------------|---|-------------------------------|
| <u>Color:</u> | Light Tan | <u>Service Temperature:</u> | -29°C (-20°F) to 49°C (120°F) |
| <u>Cured Form:</u> | Non-flammable solid | <u>Water Resistant:</u> | Yes |
| <u>Shear Strength ASTM D3498:</u> | | <u>Specifications:</u> | |
| Wet Lumber: | 295 psi | Meets and exceeds the following specifications | |
| Frozen Lumber: | 165 psi | <ul style="list-style-type: none"> American Plywood Association (APA) AFG-01 ASTM D3498-93 HUD UM No.60a | |
| Dry Lumber: | 246 psi | | |
| Gap Filling: | 248 psi | | |
| Moisture Resistance: | 152 psi | | |
| | No delamination | | |

DIRECTIONS

Tools Typically Required:

Utility knife, caulking gun, and tool to puncture cartridge seal. For best application results, LOCTITE recommends the use of a high-quality caulking gun with a 12:1 hand thrust ratio such as the Albion® B12 and B12Q Cartridge Guns

Safety Precautions:

Interior applications require ventilation to the outside during application and cure. Wear gloves to avoid skin contact. Wash hands after use.



TECHNICAL DATA SHEET

Revision: 01/11/2022
Supersedes: 07/05/2016
Ref. #: 477621

DIRECTIONS

Preparation:

The temperature of the adhesive, surfaces and the working area must be between -18°C (0°F) and 38°C (100°F). For smooth, fast, easy application during cold weather, store adhesive at room temperature, 21°C (70°F), 24 hours prior to use. Ensure surfaces to be bonded are clean, structurally sound and free of standing water, snow, ice, dust, grease, oil or other contaminants. To increase adhesion, sand glossy surfaces to a dull finish. Pre-fit all materials prior to applying product. Cut off tip of cartridge at 45° angle to desired bead size. Cut another 45° angle opposite the first cut. This will allow for applying a round bead of adhesive. For exterior applications and all subfloor applications the recommended bead size is 9.5mm (3/8") round. Puncture seal inside of nozzle.

Diagram 1



General Application:

Pre-cut and fit materials before applying adhesive. Using a caulking gun, apply adhesive in a continuous bead to joists, studs or back side of siding or panels, whichever is appropriate. Make sure that all outer edges and centers are adequately supplied with adhesive to ensure a complete and total bond. All materials should be glued together within 15 minutes after adhesive application. If work is delayed, remove applied adhesive and begin again. Use nails sparingly for support and as an aid to alignment during installation. Working time is approximately 15 minutes. Cure time is dependent upon temperature, humidity, porosity of substrate and amount of adhesive used. Low temperature and humidity will slow cure time. User is responsible for determining suitable and acceptable results for their intended project. Test before use. After use, wipe off nozzle tip and recap immediately.

Subfloor Installations:

Strict adherence to adhesive and flooring manufacturer installation instructions must be followed when used with moisture resistant premium engineered flooring panels, particularly when combined with web truss systems.

Apply a continuous line of adhesive (9.5 mm round bead) to joists/framing members, or a serpentine pattern to wide areas such as 2x4 top cords laid flat with "open web trusses". For tongue and groove panels, apply a continuous line of adhesive (6 mm thick) to groove avoiding excess "squeeze out". Each panel must be positioned in place (avoid sliding or smearing the adhesive) and fastened within 15 minutes of applying adhesive to ensure maximum bond before proceeding to the next step. (Note: if work is delayed, remove applied adhesive, and begin again.) Follow proper gapping and fastening methods as designated by the APA Nailed-Glued Fastening Schedule (Table 14) published in the APA Engineered Wood Construction Guide, Form No. E30W. (**Special note:** screws are recommended for installing subfloors to any web truss system)

Clean-up:

Clean tools and uncured adhesive residue immediately with mineral spirits or paint thinner in a well-ventilated area to the outdoors. Cured adhesive may be carefully cut away with a sharp-edged tool or other mechanical means.

STORAGE & DISPOSAL

NOT DAMAGED BY FREEZING. For best results, store product at 21°C (70°F) and <50% relative humidity. Store away from heat, flame and sparks. Take unwanted product to an approved hazardous waste facility. Hardened material may be disposed of with household trash.

LABEL PRECAUTIONS

DANGER. POISON. FLAMMABLE. FUMES MAY BE HARMFUL. CONTENTS MAY CATCH FIRE. Do not get in eyes or on skin or clothing. Do not smoke. Do not breathe fumes. Do not swallow. Use only in a well-ventilated area. Keep away from flames, such as a pilot light, and any object that sparks, such as an electric motor. Wear chemical resistant gloves. **KEEP OUT OF REACH OF CHILDREN.**

FIRST AID TREATMENT: Contains acetone and methyl acetate. If swallowed, call a Poison Control Centre or doctor immediately. If in eyes or on skin, rinse well with water. If breathed in, move person into fresh air.

Refer to the Safety Data Sheet (SDS) for further information.



TECHNICAL DATA SHEET

Revision: 01/11/2022
Supersedes: 07/05/2016
Ref. #: 477621

DISCLAIMER

The information and recommendations contained herein are based on our research and are believed to be accurate, but no warranty, express or implied, is made or should be inferred. Henkel recommends purchasers/users should test the products to determine acceptable quality and suitability for the intended use. All adhesive/sealant applications should be tested under simulated or actual end use conditions to ensure the adhesive/sealant meets or exceeds all required project specifications. Since assembly conditions may be critical to adhesive/sealant performance, it is also recommended that testing be performed on specimens assembled under simulated or actual production conditions. Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute a permission, inducement, or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

LIMITED WARRANTY

This product is warranted by Henkel Corporation to be free from defects in materials when used as directed. Henkel's sole obligation shall be, at its option, to replace or refund the purchase price of product proven to be defective. Henkel makes no other warranty – express or implied – including warranties of MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE and will not be liable for consequential or incidental damages. This Limited Warranty gives you specific legal rights, which vary from state to state. For warranty assistance, contact Henkel at 1.800.624.7767 M-F 9:00 am to 4:00 pm ET.



LePage Brand is part of the Henkel family of brands. Founded in 1876, Henkel is a global leader in the consumer and industrial businesses. Henkel operates worldwide with leading brands and technologies in three business areas: Laundry & Home Care, Beauty Care and Adhesive Technologies.

For Technical Assistance call: 1-800-624-7767 – Mon-Fri - 9:00a – 4:00p ET
www.lepage.ca



Henkel Canada Corporation - Professional & Consumer Adhesives Headquarters - Mississauga, ON L5N 6C3
www.henkel-northamerica.com