

# LOCTITE® AA 5884

November 2023

## PRODUCT DESCRIPTION

LOCTITE® AA 5884 provides the following product characteristics:

<b>Technology</b>	Cured-In-Place Gasketing
<b>Chemical Type</b>	Polyacrylate
<b>Appearance</b>	Pale yellow transparent paste
<b>Components</b>	One-component
<b>Cure</b>	Ultraviolet (UV) light
<b>Application</b>	Gasketing and sealing

LOCTITE® AA 5884 is a UV/Visible light curing, liquid elastomer designed to be cured into a compression gasket directly on the part. After curing by UVA-light, LOCTITE® AA 5884 will have a tacky surface. This tackiness can be avoided by using Hg mercury ARC-lamps. The dispensed and cured bead of LOCTITE® AA 5884 will moderately adhere to the part and can be removed for rework purpose. Once cured with a short exposure to a high intensity UV light source, the oil and thermally resistant gasket can be compressed. This product can be used in static compression gasket applications for automotive power train and related components. Typical applications include cam covers, oil pans, rear seal retainers, transmission covers, axle covers and module housings. LOCTITE® AA 5884 is halogen free and is resistant against hydrolysis. Flame resistance tested in accordance to UL94 HB.

## TYPICAL PROPERTIES OF UNCURED MATERIAL

Specific Gravity @ 25 °C	1.13
Flash Point (°C)	>93
Boeing Flow (inch/2 min.)	0
Viscosity, Plate to Plate, 0.5 mm, 23 °C:	
at 0.5 (1 /s) Pas	945
at 5 (1 /s) Pas	243

## TYPICAL CURING PERFORMANCE

UV Depth of cure, mm >5

30 s @270 mW/cm<sup>2</sup> (whole spectrum), 365 nm and 275nm absorption maximum of photoinitiators

## TYPICAL PROPERTIES OF CURED MATERIAL

Cured for 30 s per side @ 270 mW/cm<sup>2</sup> (whole spectrum), 2 mm thick film. 365 nm and 275 nm absorption maximum of PIs.

### Physical Properties

Shore Hardness, ISO 868 Durometer A	55 to 65
Elongation, at break ISO 37, %	~200
Tensile Strength, ISO 37 (N/mm <sup>2</sup> )	>4
Tensile Strength, ISO 37 (psi)	(>725)

### Physical Properties after 1000 hour

#### Immersion in ASTM SF 105 Oil @ 150°C:

Shore Hardness, ISO 868 Durometer A	50 to 70
Elongation, at break, ISO 37,%	>100
Tensile Strength, ISO 37 (N/mm <sup>2</sup> )	>3
Tensile Strength, ISO 37 (psi)	(>435)
Volume change, %	<10

### Physical Properties after 1000 hour

#### Immersion in Dexron VI ATF @150°C:

Shore Hardness ISO 868, Durometer A	50 to 70
Tensile Strength, ISO 37 (N/mm <sup>2</sup> )	>3
Tensile Strength, ISO 37 (psi)	(>435)
Elongation, at break, ISO 37, %	>100
Volume Change %	<10


## Compression Stress Relaxation, ASTM D6147

Cured for 60 s per side @ 70 mW/cm<sup>2</sup>, 365nm and 275 nm absorption maximum of PIs.

Aged @ 150°C, Dyneon fixture, 25% initial compression

red curve: LOCTITE® AA 5884 - Engine oil - 135°C

grey curve: LOCTITE® AA 5884 - Engine oil - 150°C

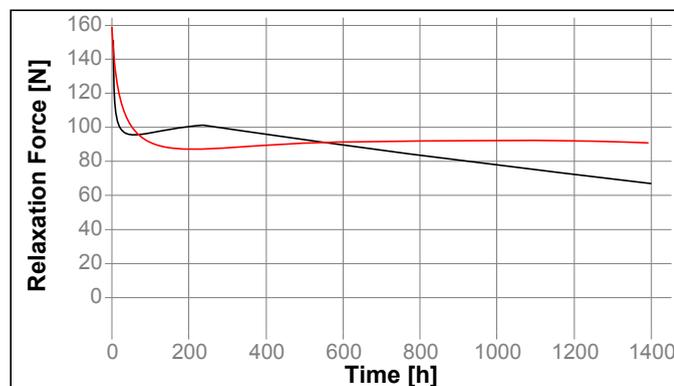

## GENERAL INFORMATION

**This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.**

**For safe handling information on this product, consult the Safety Data Sheet (SDS).**

## Directions for use

- For best performance flange surfaces should be clean and free from grease, oil and dirt.
- The product is designed for close fitting flanged parts and flanged parts with torque limiters.
- To obtain best results, each application should be evaluated under the specific conditions anticipated for performance and durability of the parts.
- The warpage of plastic parts and flatness deviation should be controlled to nil/minimum for effective sealing.
- Consult with Henkel Technical team for optimum sealant usage and best performance on specific groove dimensions.

**Storage**

Store product in the unopened container in a dry location. Storage information may be indicated on the product container labeling.

**Optimal Storage: 8°C to 28°C. Storage below 8°C or greater than 28°C can adversely affect product properties.**

Material removed from containers may be contaminated during use. Do not return product to the original container. Henkel Corporation cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Henkel representative.

**Not for product specifications**

The technical data contained herein are intended as reference only. Please contact your local quality department for assistance and recommendations on specifications for this product.

**Conversions**

$$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$$

$$\text{kV/mm} \times 25.4 = \text{V/mil}$$

$$\text{mm} / 25.4 = \text{inches}$$

$$\mu\text{m} / 25.4 = \text{mil}$$

$$\text{N} \times 0.225 = \text{lb}$$

$$\text{N/mm} \times 5.71 = \text{lb/in}$$

$$\text{N/mm}^2 \times 145 = \text{psi}$$

$$\text{MPa} \times 145 = \text{psi}$$

$$\text{N}\cdot\text{m} \times 8.851 = \text{lb}\cdot\text{in}$$

$$\text{N}\cdot\text{m} \times 0.738 = \text{lb}\cdot\text{ft}$$

$$\text{N}\cdot\text{mm} \times 0.142 = \text{oz}\cdot\text{in}$$

$$\text{mPa}\cdot\text{s} = \text{cP}$$

**disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

**Trademark usage**

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

## Reference 2

**ADDITIONAL INFORMATION****Disclaimer**

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

**In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:**

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

**In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:**

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

**In case products are delivered by Henkel Corporation, or Henkel Canada Corporation, the following disclaimer is applicable:**

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically**