

LOCTITE® DRI 211™

Known as LOCTITE® 211™
March 2016

PRODUCT DESCRIPTION

LOCTITE® DRI 211™ provides the following product characteristics:

Technology	Acrylic
Chemical Type	Dimethacrylate
Appearance	Pink fluorescent opaque liquid ^{LMS}
Viscosity	Low
Cure	Anaerobic
Application	Coating
Recommended Gap	0.1 mm
Maximum recommended bolt size	M16

LOCTITE® DRI 211™ is a preapplied coating for threaded fasteners and fittings. During assembly microcapsules, which are contained within the coating, are crushed thereby releasing an active ingredient which initiates the curing process. The product prevents loosening through vibration and leakage of threaded fasteners.

TYPICAL PROPERTIES OF UNCURED MATERIAL


Specific Gravity @ 25 °C	1.07
Flash Point - See SDS	
Viscosity, Brookfield - RVT, 25 °C, mPa·s (cP):	
Spindle 6, speed 20 rpm	20,000 to 40,000 ^{LMS}
Vapour Pressure, hPa	<2

TYPICAL CURING PERFORMANCE

Cure Speed vs. Substrate

The graph below shows the breakaway strength developed with time on M10 black oxide bolts and steel nuts compared to different materials

The breakaway strength was determined according to ISO-10964

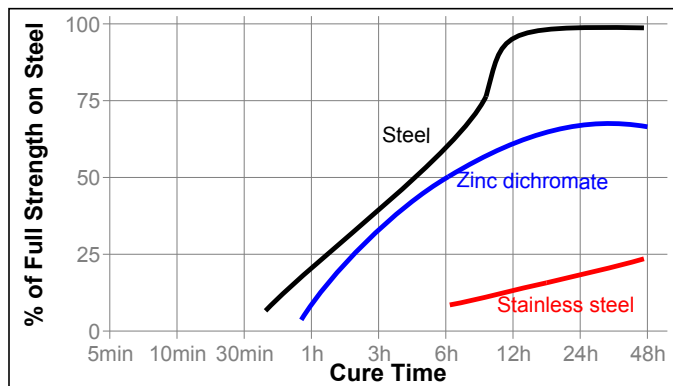


Cure Speed vs. Bond Gap

Large gaps should be avoided. Close fitting threads are required to crush the microcaps which are necessary for cure.

Cure Speed vs. Temperature

Tests were made on M10 black oxide bolts and steel nuts according to ISO 10964.

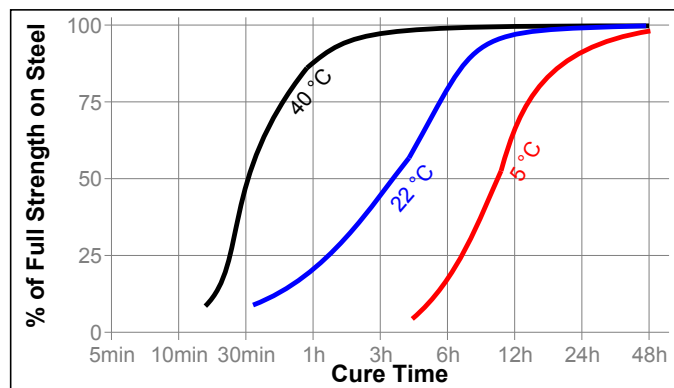

TYPICAL PROPERTIES OF CURED MATERIAL

Physical Properties:

Coefficient of Thermal Expansion, ISO 11359-2, K ⁻¹	100×10 ⁻⁶
Coefficient of Thermal Conductivity, ISO 8302, W/(m·K)	0.1
Specific Heat, kJ/(kg·K)	0.3

TYPICAL PERFORMANCE OF CURED MATERIAL

Cured for 24 hours @ 22 °C.

Prevail Torque, ISO 10964:

M10 black oxide bolts and mild steel nuts (unseated)	N·m	≥10 ^{LMS}
	(lb.in.)	(≥88.5)

Breakaway Torque, ISO 10964:

M10 black oxide bolts and mild steel nuts (unseated)	N·m	≥8 ^{LMS}
	(lb.in.)	(≥71)

Breakaway Torque, MIL-S-46163

N·m	6 to 24
(lb.in.)	(53 to 212)

Prevail Torque, MIL-S-46163

N·m	8 to 30
(lb.in.)	(70 to 265)

Breakloose Torque, DIN 54454


N·m	20 to 40
(lb.in.)	(177 to 354)

Max. Prevail Torque, DIN 54454

N·m	20 to 40
(lb.in.)	(177 to 354)

Torque Augmentation

Breakloose torque of an uncoated fastener will normally be 15 to 30% less than the on-torque. The effect of LOCTITE® DRI 211™ on the breakloose torque is shown in the graph below.

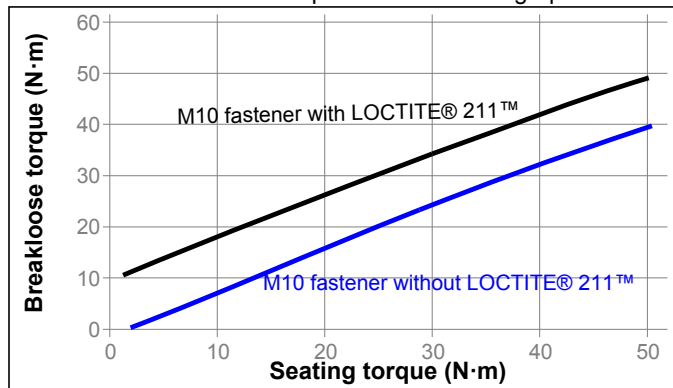


TYPICAL ENVIRONMENTAL RESISTANCE


Cured for 1 week @ 22 °C.

Breakloose Torque, DIN 54454:

M10 zinc phosphate steel nuts and bolts

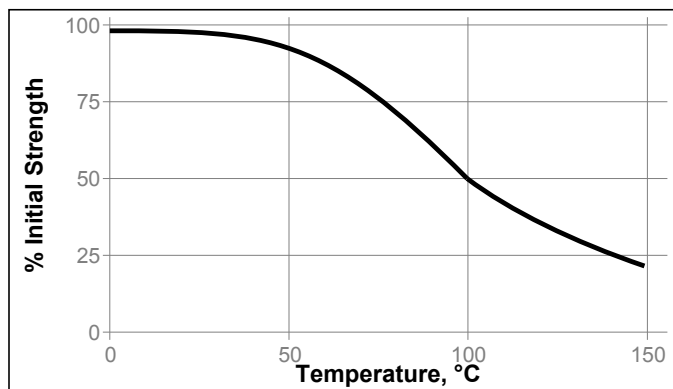

Heat Aging

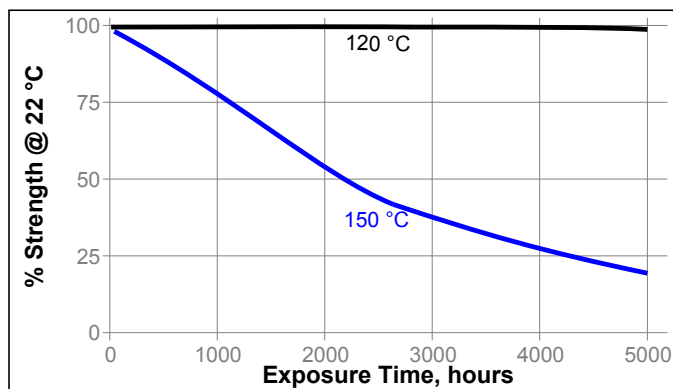

Chemical/Solvent Resistance

Cured for 168 hours @ 22 °C.

Environment	°C	% of initial strength		
		100 h	500 h	1000 h
Motor oil (MIL-L-46152)	87	100	100	100
Motor oil (MIL-L-46152)	125	100	100	100
Unleaded gasoline	22	100	100	100
Leaded Gasoline	22	100	100	100
Brake fluid	22	100	100	100
Ethanol	22	100	100	100
1,1,1 Trichloroethane	22	100	100	100
Water/glycol 50/50	87	100	100	100

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Safety Data Sheet (SDS).

Where aqueous washing systems are used to clean the surfaces before bonding, it is important to check for compatibility of the washing solution with the adhesive. In some cases these aqueous washes can affect the cure and performance of the adhesive.

This product is not normally recommended for use on plastics (particularly thermoplastic materials where stress cracking of the plastic could result). Users are recommended to confirm compatibility of the product with such substrates.

Directions for use:

1. For best performance bond surfaces should be clean and free from grease.
2. Apply sufficient product to fill the threads in the area where the nut will be engaged on the bolt.
3. This product performs best in thin bond gaps (0.05 mm). Very large thread sizes may create large gaps which will affect cure speed and strength.
4. This product is designed to give controlled friction, (torque/tension ratio), during assembly. In critical tightening applications this ratio should be confirmed.

Loctite Material Specification^{LMS}

LMS dated May 28, 1999. Test reports for each batch are available for the indicated properties. LMS test reports include selected QC test parameters considered appropriate to specifications for customer use. Additionally, comprehensive controls are in place to assure product quality and consistency. Special customer specification requirements may be coordinated through Henkel Quality.

Storage

Store product in the unopened container in a dry location. Storage information may be indicated on the product container labeling.

Optimal Storage: 8 °C to 21 °C. Storage below 8 °C or greater than 28 °C can adversely affect product properties.

Material removed from containers may be contaminated during use. Do not return product to the original container. Henkel Corporation cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Technical Service Center or Customer Service Representative.

Conversions

$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$
 $\text{kV/mm} \times 25.4 = \text{V/mil}$
 $\text{mm} / 25.4 = \text{inches}$
 $\mu\text{m} / 25.4 = \text{mil}$
 $\text{N} \times 0.225 = \text{lb}$
 $\text{N/mm} \times 5.71 = \text{lb/in}$
 $\text{N/mm}^2 \times 145 = \text{psi}$
 $\text{MPa} \times 145 = \text{psi}$
 $\text{N}\cdot\text{m} \times 8.851 = \text{lb}\cdot\text{in}$
 $\text{N}\cdot\text{m} \times 0.738 = \text{lb}\cdot\text{ft}$
 $\text{N}\cdot\text{mm} \times 0.142 = \text{oz}\cdot\text{in}$
 $\text{mPa}\cdot\text{s} = \text{cP}$

Note:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Corporation, Resin Technology Group, Inc., or Henkel Canada Corporation, the following disclaimer is applicable:

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically**

disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits. The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

Reference 0.4