

# Plastifelt Ultra

## APP modified polyester reinforced bituminous waterproofing membrane

Bituminous waterproofing membrane, manufactured from a mixture of bitumen and selected polymers, which are blended together to obtain excellent waterproofing properties.

### CHARACTERISTICS

- ▶ Excellent resistance to positive water & vapor pressure
- ▶ High durability to ageing and atmospheric agents
- ▶ Good dimensional stability under tension
- ▶ Superior flexibility. Accommodates structural movements
- ▶ Resistant to water borne chemicals attack



### DESCRIPTION

Plastifelt Ultra is a polymer modified bituminous waterproofing membrane, manufactured from a mixture of bitumen and selected polymers, which are blended together to obtain good waterproofing properties. The bitumen compound also exhibits high heat and UV resistance properties. The polymerized bitumen is coated on to a dimensionally stable reinforcement polyester.

### FIELDS OF APPLICATION

Plastifelt Ultra is used as waterproofing membrane on the following structures:

- inverted roofs & parapets
- terraces, balconies & patios
- sunken slabs

Plastifelt Ultra membranes in tropical regions can also be used for waterproofing of below ground concrete structures like:

- concrete foundations & footings.
- pile heads
- swimming pools & water retaining structures (externally)

### APPLICATION INSTRUCTIONS

The application temperature should be between 5°C to 55°C. Application procedures may vary depending on site conditions. The general recommended guidelines for the application of the waterproofing system is as follows:

#### Surface preparation

The surface shall be cleaned thoroughly of all contaminants like dust, traces of curing compound, oil and grease. All surface imperfections, protrusions, structurally unsound



TDS\_Plastifelt Ultra\_RTL\_0718


1

and friable concrete must be removed and repaired with a suitable Polycrrete\* concrete repair mortar.

#### Priming

Apply Polyprime SB\*(Solvent based primer) @ 4-6 m<sup>2</sup>/L to a clean smooth and dry surface by brush, roller or spray. Allow the primer to dry prior to the application of the membrane. As the viscosity of the primer is low, it easily penetrates into the concrete pores which promotes adhesion between the membrane and the concrete surface. In addition to that the primer also acts as a binder for the

Polyester reinforcement

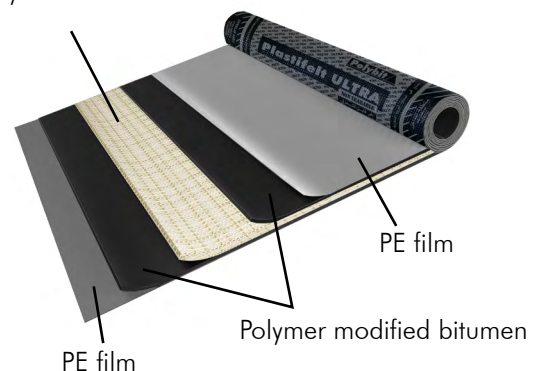

dust particles which gets accumulated on the concrete surface even after cleaning.

### Alignment

Start the installation of all membrane plies from the low point or drains, so the flow of water is over or parallel to the plies, but never against the laps. All overlaps at the membrane seams shall be installed so as to have "up" slope laps over "down" slope laps. Begin membrane application by unrolling the roll of Plastifelt Ultra membrane and aligning the side laps. Re-roll the roll halfway and stand on the unrolled portion to prevent shifting. Side overlaps should be a minimum of 100 mm and the end overlaps 150mm.

### Torching

Plastifelt Ultra membranes are installed by using a cylinder fed propane gas torch. Use of hand-held roofing torch is recommended as it affords a good control. If multiple burner torching machines are utilized, care must be taken to ensure the application of uniform heat and avoid overheating the membrane. Begin torching the embossed polyethylene side of the rolled portion of the membrane. Proper torching procedure involves passing the torch flame in an "L" pattern applying about 75 percent of the heat across the coiled portion of the roll and 25 percent across the substrate, including the lap area of the previously installed membrane. As the membrane is heated the embossing starts to melt away exposing a shiny bitumen surface. Roll forward the membrane and press firmly with the boot or roller against the substrate to bond well. The propane flame should be moved from side to side and up the lap edge while the membrane is slowly unrolled and adhered to the underlying surface. Subsequent shift of the roll shall be avoided after heating has begun. When complete, the remaining un-torched membrane shall be re-rolled and installed in the same manner. When one end is complete, re-roll the opposite end not yet torched, and install in the same manner. As subsequent rolls are installed, heat is applied to both the roll and the exposed laps of the membrane being overlapped onto. Be sure to heat the entire roll evenly, not just the lap areas, with extra concentration at the laps.

#### CAUTION:

Do not over torch the membrane as this will expose the reinforcement and cause damage to it.

### Up stand

Flashing details are accomplished using cut pieces of Plastifelt Ultra membrane in combination with appropriate prefabricated flashing components. The same side lap and end lap rules apply to flashing details as to field membrane. All angles and abutments should be sealed with extra care to ensure full bonding. An appropriate flashing membrane (mineral surface membrane) shall be lapped with the base membrane and taken up on the parapet wall and tucked into a groove cut into the concrete. The grooves will be sealed with a suitable mastic sealant (Bitumastic)\*.

### Sealing

Heat both the overlaps and use round tipped trowel to seal the overlap. Adequate heat is confirmed when a uniform

flow of melted bitumen compound flows evenly like a bead that oozes from the applied membrane's edges. Excess compound should be smoothed and pressed into the seam using a heated trowel. Any unbonded areas must be lifted and re-torched. Do not attempt to reseal by torching the top surface of the membrane.

## TECHNICAL SPECIFICATION

PROPERTIES	VALUES	TEST STANDARDS
Thickness, [mm]	4.0	DIN EN 1849-1
Mass per unit area, [kg/m <sup>2</sup> ]	4.0-4.4	DIN EN 1849-1
Reinforcement [Polyester], [g/m <sup>2</sup> ]	120	EN 29073-1
Coating asphalt softening point [R&B], [°C]	Polymer modified asphalt >125	ASTM D 36
penetration @25°C, [0.1 mm]	12-22	ASTM D 5
Tensile strength [L/T], [N/5cm]	500/300	DIN EN 12311-1
Elongation @break, [%]	30/40	DIN EN 12311-1
Tear resistance [L/T], [N]	300/200	ASTM D 5147
Hydrostatic pressure @3 bar [30m]	No leakage	BS EN 12390 (part 8)
Water absorption [%], [BSP]	< 0.50	ASTM D 570
Heat resistance @100°C	No flow	DIN EN 52-123

*All values given are subject to 5-20% tolerance*

## STANDARDS

Plastifelt Ultra conforms to the requirements of UEAtc 2001.

## STORAGE & SHELF LIFE

Plastifelt Ultra rolls must be stored in a shaded area on wooden pallets neatly covered by a thick fabric and tied securely in a manner that will minimize exposure to sunlight and UV. The membrane shall be protected from all sources of heat. Do not stack pallets on top of each other. The shelf life is 12 months if stored as per recommendations. Excessive exposure to sunlight, UV and other sources of heat will result in considerable deterioration of the product and reduce its shelf life.

## SAFETY PRECAUTIONS


Any naked flame should be kept well away from the gas cylinders. When ignited the torch should be watched at all times. The torch should not be rested on finished roofing. Extreme care should be taken when working near combustible materials or items which might be scorched by the gas flame.

## HEALTH & SAFETY

Plastifelt Ultra membranes contain a tacky bitumen compound which when applied can stick to human skin. Such stains can be removed by using a cloth dipped in a suitable cleaner.

- 1 Bitumastic/Polysael PS
- 2 Aluminum metal flashing
- 3 Cement sand angle fillet
- 4 Cement sand screed / cement
- 5 Separation layer

- 1 Thermal insulation board
- 2 Bitumen membrane (Plastifelt Ultra)
- 3 Bitumen primer (Polyprime SB)
- 4 Foam concrete
- 5 RCC slab
- 5 Mineral membrane

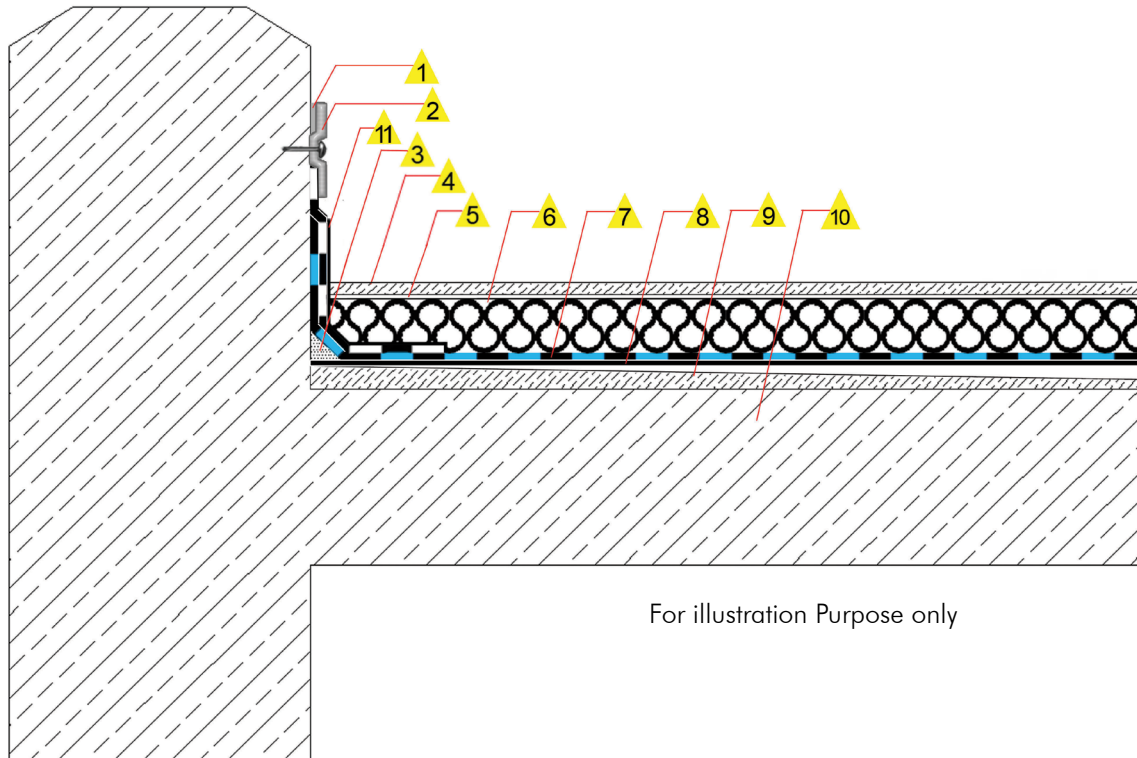

For illustration Purpose only

## SUPPLY

Plastifelt Ultra	4mm	1 m x 10m, wt 40kg#
Polyprime SB		20L pail & 200L drum
Bitumastic		20kg pail

# Approximate weight

Apart from the information given here it is also important to observe the relevant guidelines and regulations of various organisations and trade associations as well as the respective standards. The aforementioned characteristics are based on practical experience and applied testing. Warranted properties and possible uses which go beyond those warranted in this information sheet require our written confirmation. All data given was obtained at an ambient and material temperature of +23°C and 50 % relative air humidity at laboratory conditions unless specified otherwise. Please note that under other climatic conditions hardening can be accelerated or delayed.

The information contained herein, particularly recommendations for the handling and use of our products, is based on our professional experience. As materials and conditions may vary with each intended application, and thus are beyond our sphere of influence, we strongly recommend that in each case sufficient tests are conducted to check the suitability of our products for their intended use. Legal liability cannot be accepted on the basis of the contents of this data sheet or any verbal advice given, unless there is a case of wilful misconduct or gross negligence on our part. This technical data sheet supersedes all previous editions relevant to this product.



**Henkel Polybit Industries Ltd.**

PO Box: 293, Umm Al Quwain, UAE

Phone: +971 (6) 76 70 777; Fax: +971 (6) 76 70 197

henkelpolybit@henkel.com; www.henkelpolybit.com

**Quality for Professionals**