



# Technical Data Sheet



Technical Data Sheet  
Ref: SE10000  
Issued: 13.10.22  
Number of pages: 2

## Sellotape Sticky Fixers Permanent

### CHARACTERISTICS

- Permanent foam pads
- Double sided
- Pre-cut
- Hundreds of crafting and mounting uses

### PRODUCT DESCRIPTION

Sellotape Sticky Fixers (Permanent) are made from white closed cell polyethylene foam coated on both sides with an aggressive synthetic rubber resin pressure sensitive adhesive.

### TECHNICAL DATA


Thickness	2.0mm
Tensile strength	27.5N/cm
Elongation at break	110%
Max. weight loading	30g/cm
Temperature range	-40 to +70°C

### APPLICATION

Sellotape Sticky Fixers (Permanent) are the simple alternative to screws, nails and glue.

Ideal for joining or mounting plastic, wood, ceramic and metal.

They can be used to permanently mount hooks, nameplates, signs and display work.

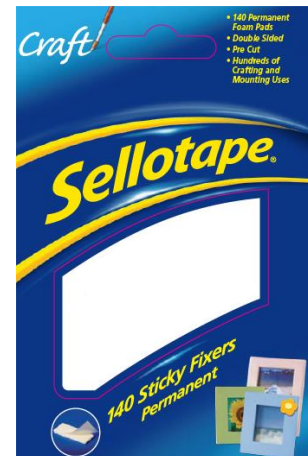



## **Roll Sizes**

Wallet - 56 pads (12mm x 25mm)

Box – Strip 25mm x 3m

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

## **Henkel Limited**

Wood Lane End, Hemel Hempstead, Hertfordshire HP2 4RQ

Phone: +44 (0) 1606 593 933

Internet: [www.henkel.co.uk](http://www.henkel.co.uk)

e.mail: [technical.services@henkel.co.uk](mailto:technical.services@henkel.co.uk)